



Ermetika[®]
DESIGN PASSAGES



PRODUCT
BROCHURE
— 2024

XREVERX[®] XL
FLUSH REVERSIBLE HINGED DOOR **2400**

FEASIBLE DIMENSIONS

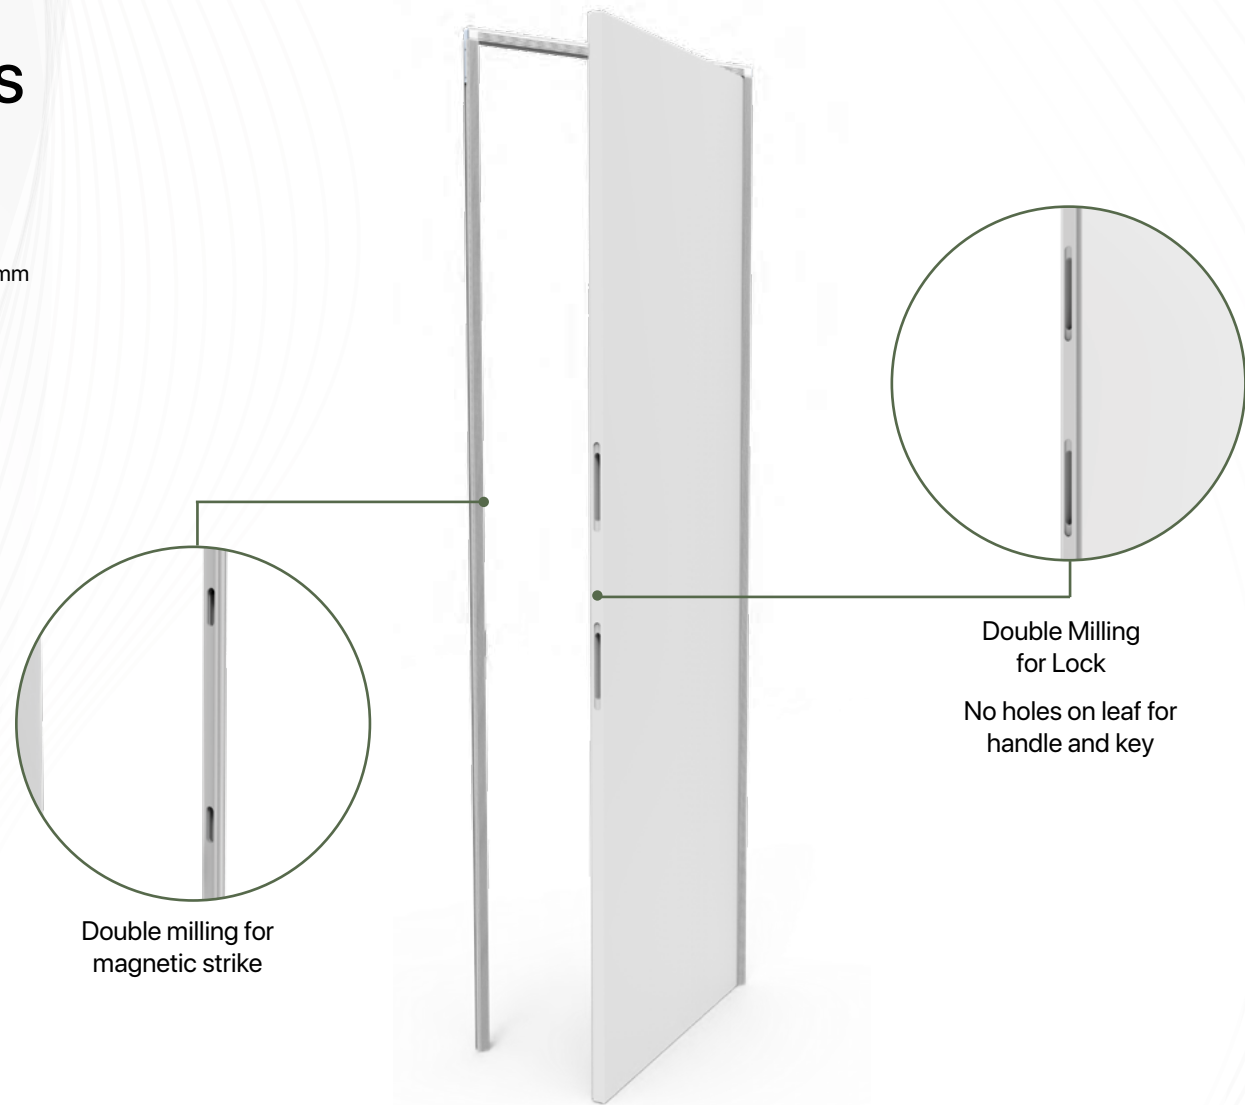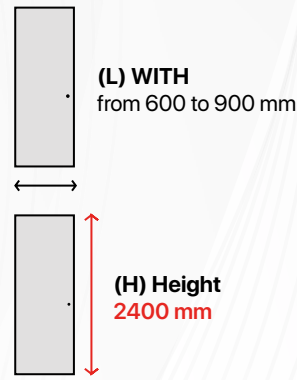

ALL-IN-ONE PRODUCT

frame + door + hardware in one package




THREE ADJUSTABLE HINGES




XREVERX - XL

REVERSIBLE: XRS

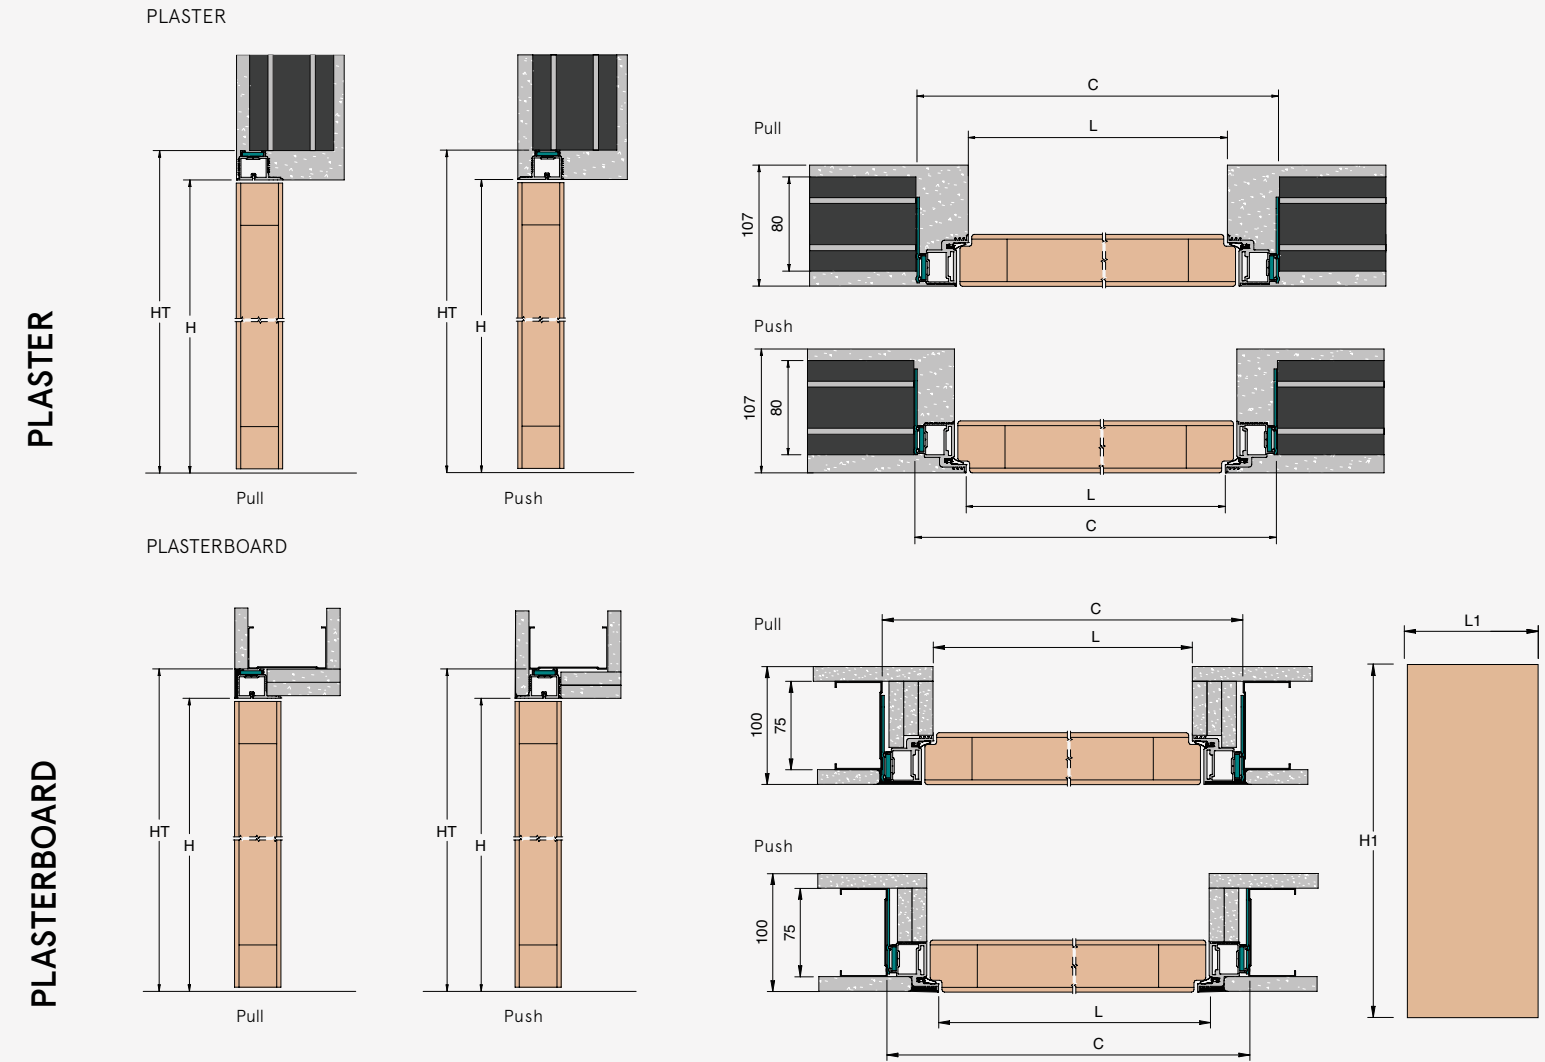

PASSAGE SIZE L x H	DOOR SIZE L1 x H1	OVERALL SIZE C x HT
600 x 2400	613 x 2394	690 x 2430
700 x 2400	713 x 2394	790 x 2430
800 x 2400	813 x 2394	890 x 2430
900 x 2400	913 x 2394	990 x 2430

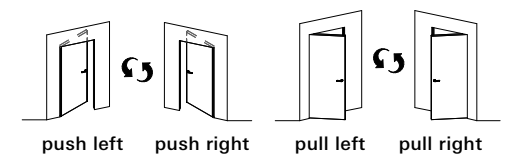

FEASIBLE DIMENSIONS

WIDTH
L from 600 to 900 mm


HEIGHT
H 2400 mm

FORMULAS TO CALCULATE DIMENSION

WIDTH
 $L + 90 \text{ mm}$

HEIGHT
 $H + 30 \text{ mm}$


DOOR OPENING DEGREES

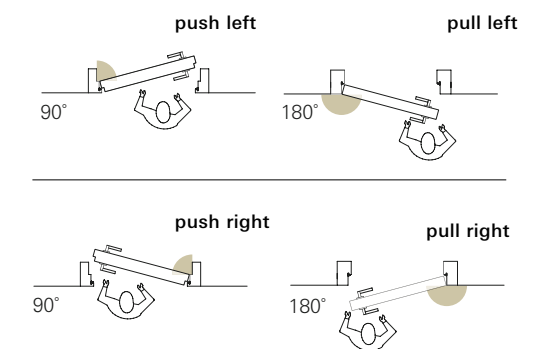


xREVERx XL

xREVERx is the flush-to-wall hinged model from Ermetika that, thanks to its reversible technology, allows for all four opening directions in a single product. The new XL model, with a height of 2400 mm, is the result of a technical intuition with significant functional impact. By applying a double lock milling, with a corresponding double milling for a magnetic meeting, the system can be installed in the desired opening direction, regardless of the non-standard height. With xREVERx XL, Ermetika anticipates market demands, ensuring flexibility and impeccable aesthetics.


HOW TO SET THE OPENING DIRECTION?

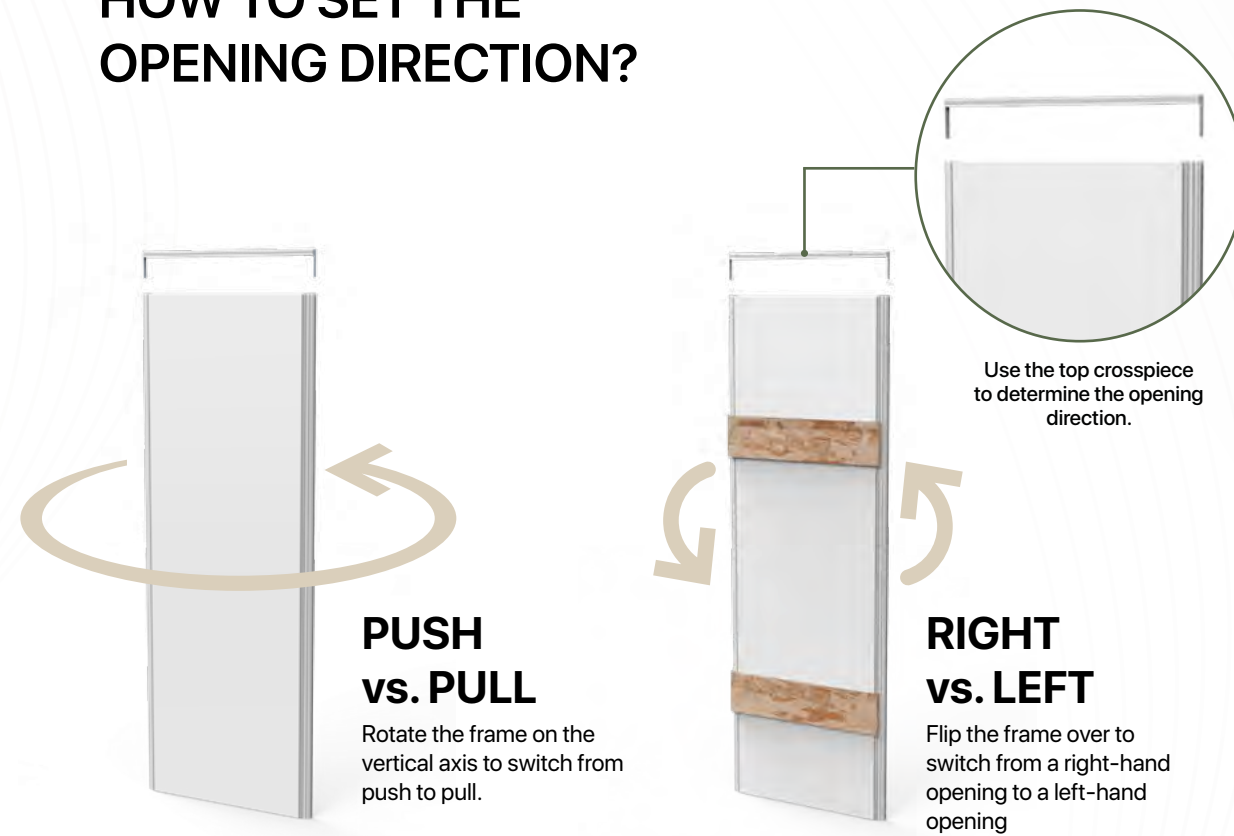

PLASTER AND PLASTERBOARD INSTALLATION

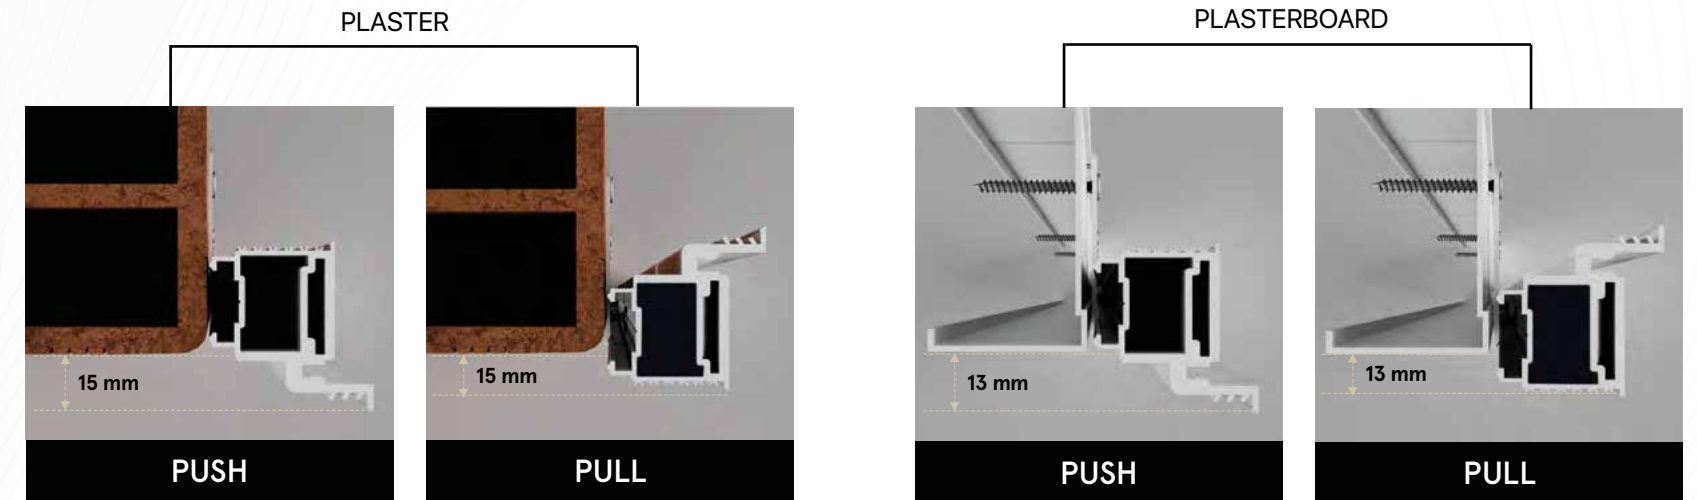


DOOR AND FRAME SET

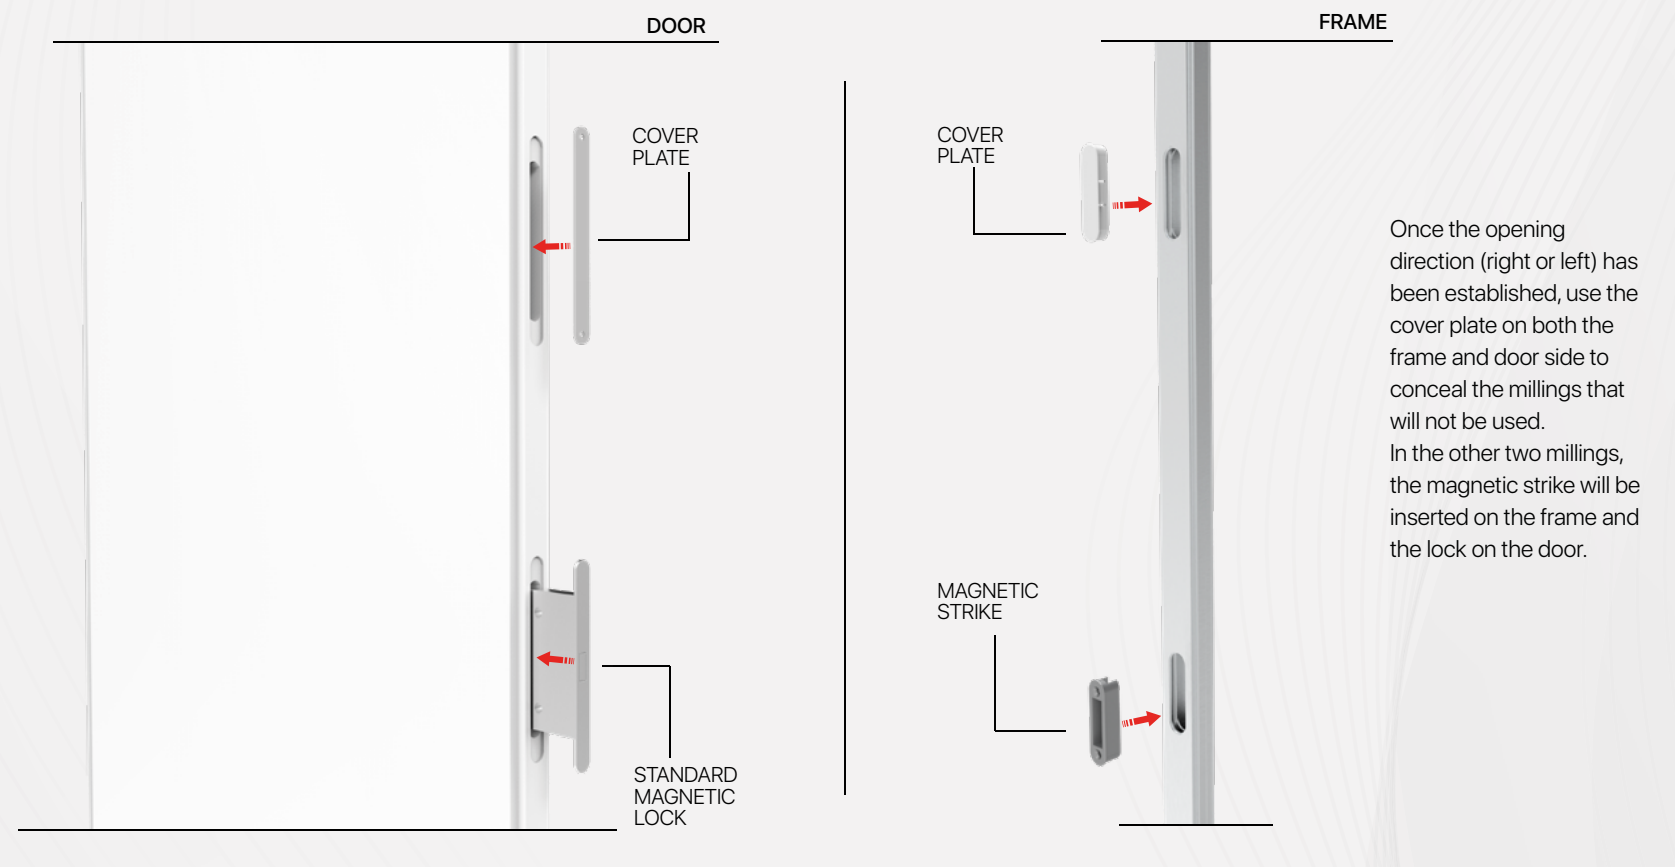

FINISHING

INSTALLATION ON PLASTER


Use the fiberglass mesh before applying the mortar.

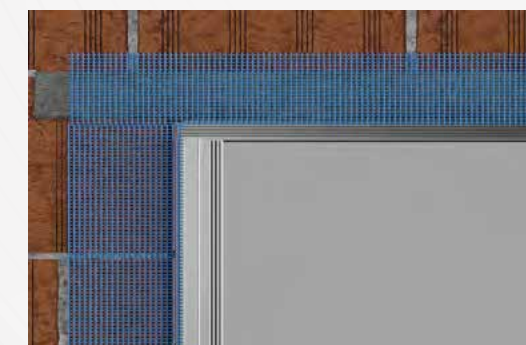

FIBERGLASS MESH (not included)


INSTALLATION ON PLASTER AND PLASTERBOARD

Use the adhesive joint cover tape before grouting.

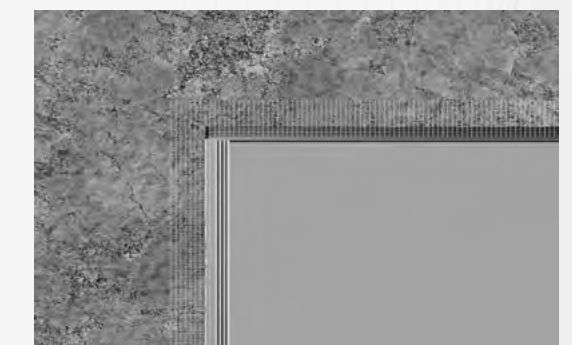


JOINT COVER TAPE (not included)

Plaster configuration

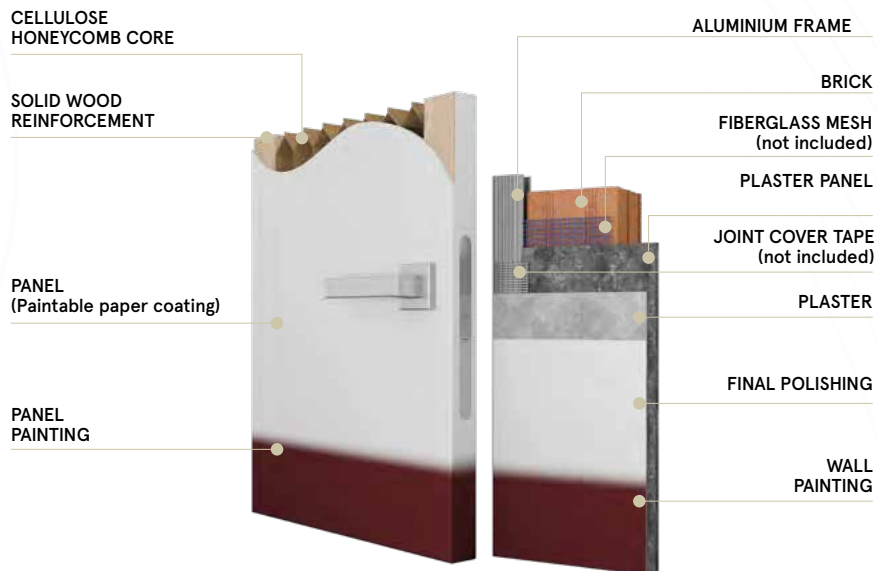

Plasterboard configuration

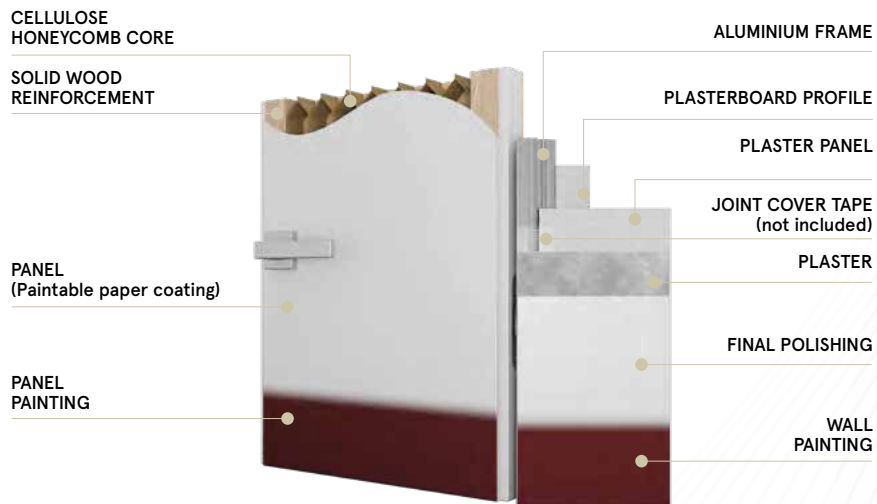

XREXRX[®]

**VI
AL
2400**



Kit content

- 3 hinges adjustable on 3 axes
- Standard magnetic lock
- Polyurethane foam gasket
- Cover Plate for frame and door