

# Arkimede

CURVED SLIDING DOOR / PORTE COULISSANTE COURBE

SINGLE DOOR / SIMPLE VANTAIL

PLASTER / ENDUIT

Cod. AKSI



## Feasible Dimensions

Length  $\boxed{L}$  from 600 mm to 1000 mm (wall 107)  
Length  $\boxed{L}$  from 600 mm to 1200 mm (wall 125)

Height  $\boxed{H}$  2000/2100 mm (wall 107)  
Height  $\boxed{H}$  from 1000 mm to 2500 mm (wall 125)




## Overall Dimensions Formula


Length  $\boxed{C} = \boxed{L} \times 2 + 100 \text{ mm}$   
Height  $\boxed{HT} = \boxed{H} + 100 \text{ mm}$



**Opening direction**  
(to be specified at the time of ordering)  
**Sens d'ouverture**  
(à indiquer lors de la commande)




**Left-hand opening (LH)**  
*Ouverture à gauche (G)*

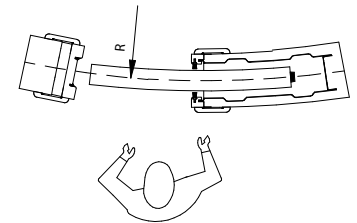

**Right-hand opening (RH)**  
*Ouverture à droite (D)*

- Frame / Châssis
- Door / Porte
- Plaster / Enduit

| Wall | Internal | Brick | Door |
|------|----------|-------|------|
| 107  | 70       | 80    | 42   |
| 125  | 90       | 100   | 42   |

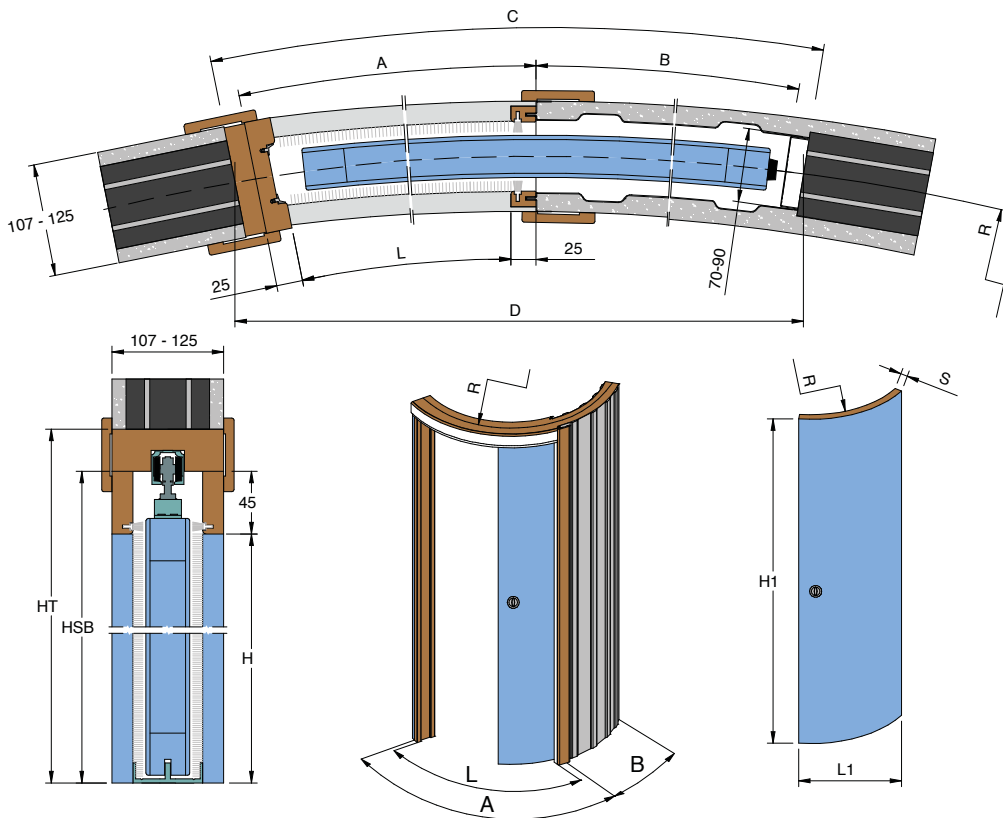

### PASSAGE SIZE (mm)

| Length<br>$\boxed{L}$ | Height<br>$\boxed{H}$ |
|-----------------------|-----------------------|
| 600                   | 2000 2100             |
| 700                   | 2000 2100             |
| 800                   | 2000 2100             |
| 900                   | 2000 2100             |
| 1000                  | 2000 2100             |

### DOOR SIZE (mm)

| Length<br>$\boxed{L1}$ | Height<br>$\boxed{H1}$ |
|------------------------|------------------------|
| 620                    | 2010 2110              |
| 720                    | 2010 2110              |
| 820                    | 2010 2110              |
| 920                    | 2010 2110              |
| 1020                   | 2010 2110              |

### OVERALL SIZE (mm)

| Length<br>$\boxed{C}$ | Height<br>$\boxed{HT}$ |
|-----------------------|------------------------|
| 1300                  | 2100 2200              |
| 1500                  | 2100 2200              |
| 1700                  | 2100 2200              |
| 1900                  | 2100 2200              |
| 2100                  | 2100 2200              |

| H below the Track<br>$\boxed{HSB}$ | L+Jambs<br>$\boxed{A}$ | Pocket<br>$\boxed{B}$ |
|------------------------------------|------------------------|-----------------------|
| 2045 2145                          | 650                    | 600                   |
| 2045 2145                          | 750                    | 700                   |
| 2045 2145                          | 850                    | 800                   |
| 2045 2145                          | 950                    | 900                   |
| 2045 2145                          | 1050                   | 1000                  |

**STANDARD RADII / RAYONS STANDARD**  
R=1000-1200-1500-1700-2000 mm  
Measurements referred to the track axis.  
*Mesures référées à l'axe du rail.*

**NON-STANDARD RADII / RAYONS HORS STANDARD:**  
It is possible to request non-standard radii with a minimum dimension of 1000 mm.  
*Il est possible de demander des rayons hors standard avec une dimension minimale de 1000 mm.*

# Arkimede

CURVED SLIDING DOOR / PORTE COULISSANTE COURBE

DOUBLE DOOR / DOUBLE VANTAUX

PLASTER / ENDUIT

Cod. AKDI



## Feasible Dimensions

Length  $\boxed{L}$  from 600 + 600 mm to 1000 + 1000 mm (wall 107)

Length  $\boxed{L}$  from 600 + 600 mm to 1200 + 1200 mm (wall 125)

Height  $\boxed{H}$  2000/2100mm (wall 107)


Height  $\boxed{H}$  from 1000 mm to 2500 mm (wall 125)



## Overall Dimensions Formula

Length  $\boxed{C} = \boxed{L} \times 2 + 100 \text{ mm}$

Height  $\boxed{HT} = \boxed{H} + 100 \text{ mm}$

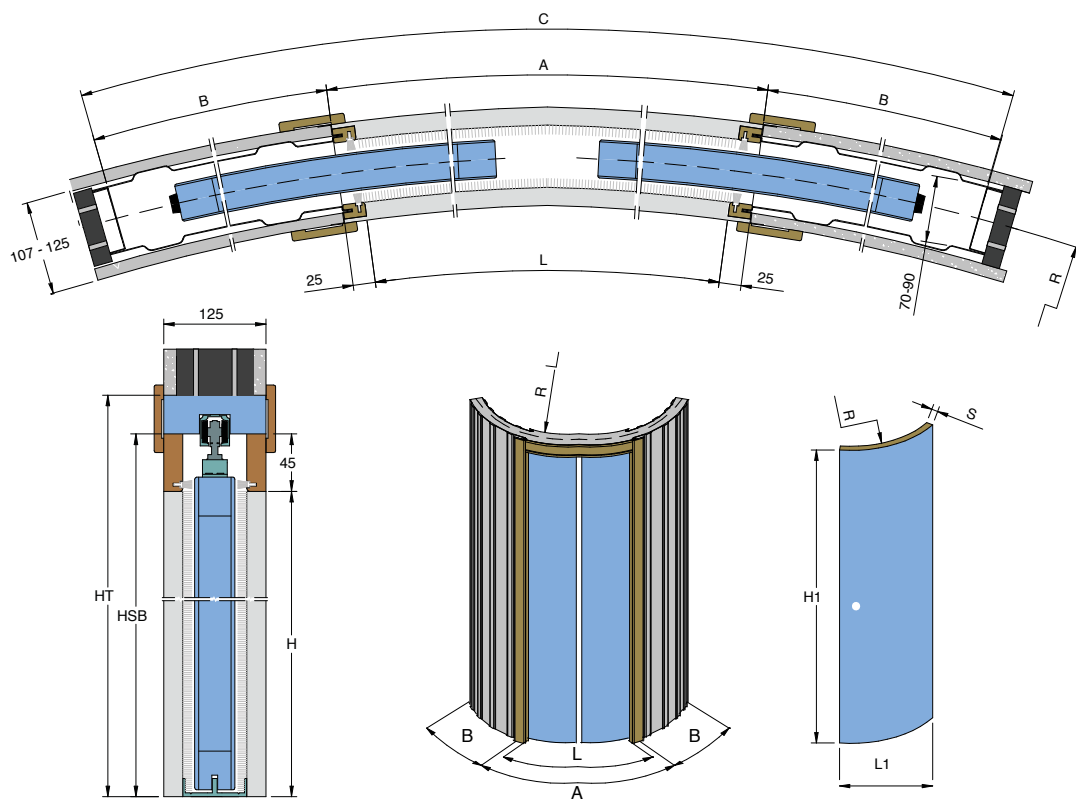

- Frame / Châssis
- Door / Porte
- Plaster / Enduit

| Wall | Internal | Brick | Door |
|------|----------|-------|------|
| 107  | 70       | 80    | 42   |
| 125  | 90       | 100   | 42   |

### PASSAGE SIZE (mm)

| Length<br>$\boxed{L}$ | Height<br>$\boxed{H}$ |
|-----------------------|-----------------------|
| 1200                  | 2000 2100             |
| 1400                  | 2000 2100             |
| 1600                  | 2000 2100             |
| 1800                  | 2000 2100             |
| 2000                  | 2000 2100             |

### DOOR SIZE (mm)

| Length<br>$\boxed{L1}$ | Height<br>$\boxed{H1}$ |
|------------------------|------------------------|
| 620                    | 2010 2110              |
| 720                    | 2010 2110              |
| 820                    | 2010 2110              |
| 920                    | 2010 2110              |
| 1020                   | 2010 2110              |

### OVERALL SIZE (mm)

| Length<br>$\boxed{C}$ | Height<br>$\boxed{HT}$ |
|-----------------------|------------------------|
| 2500                  | 2100 2200              |
| 2900                  | 2100 2200              |
| 3300                  | 2100 2200              |
| 3700                  | 2100 2200              |
| 4100                  | 2100 2200              |

| H below the Track<br>$\boxed{HSB}$ | L+Jambs<br>$\boxed{A}$ | Pocket<br>$\boxed{B}$ |
|------------------------------------|------------------------|-----------------------|
| 2045 2145                          | 1250                   | 600                   |
| 2045 2145                          | 1450                   | 700                   |
| 2045 2145                          | 1650                   | 800                   |
| 2045 2145                          | 1850                   | 900                   |
| 2045 2145                          | 2050                   | 1000                  |

#### RAGGI STANDARD:

R=1000-1200-1500-1700-2000 mm  
misure riferite all'asse binario.

#### RAGGI FUORI STANDARD:

È possibile richiedere raggi fuori standard con  
dimensione minima 1000 mm.