

Arkimede

CURVED SLIDING DOOR / PORTE COULISSANTE COURBE

SINGLE DOOR / SIMPLE VANTAIL

PLASTERBOARD
PLAQUE DE PLÂTRE

Cod. AKSC



Feasible Dimensions

Length **[L]** from 600 mm to 1200 mm (wall 125)
Height **[H]** from 1000 mm to 2500 mm (wall 125)




Overall Dimensions Formula


Length **[C]** = **[L]** x 2 + 100 mm
Height **[HT]** = **[H]** + 100 mm



Opening direction
(to be specified at the time of ordering)
Sens d'ouverture
(à indiquer lors de la commande)



Apertura a Sinistra (SX)




Apertura a Destra (DX)

Frame / Châssis
Door / Porte
Plasterboard / Plaque de plâtre

Wall Internal Studwork Door

125 80 100 42

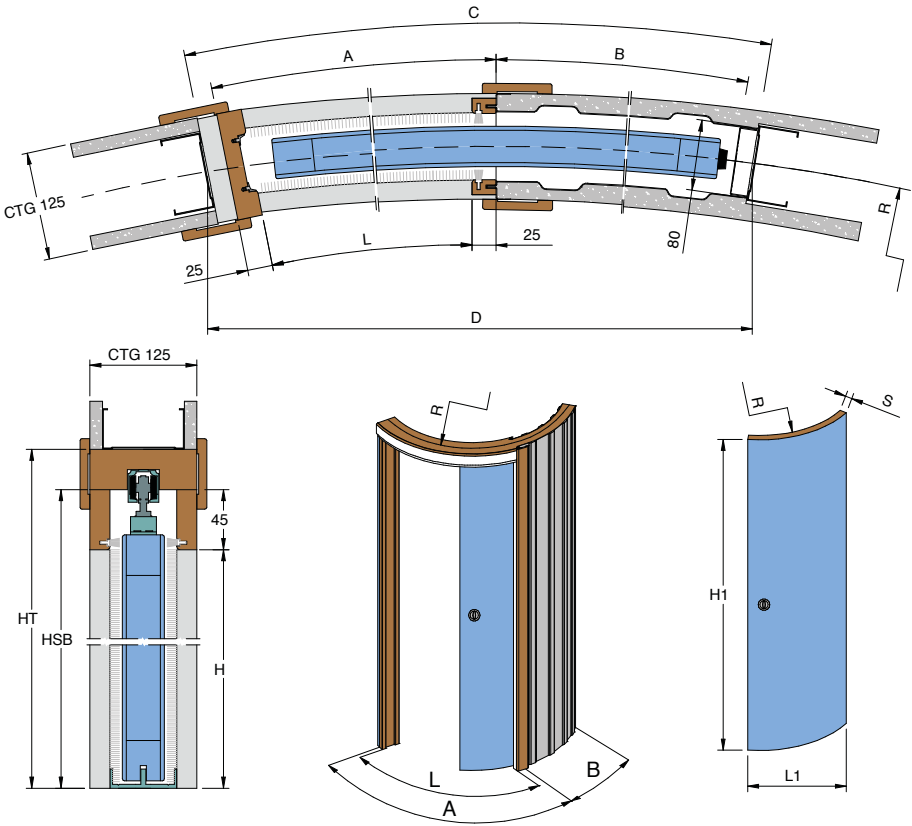

PASSAGE SIZE (mm)

Length [L]	Height [H]	
600	2000	2100
700	2000	2100
800	2000	2100
900	2000	2100
1000	2000	2100

DOOR SIZE (mm)

Length [L1]	Height [H1]	
620	2010	2110
720	2010	2110
820	2010	2110
920	2010	2110
1020	2010	2110

OVERALL SIZE (mm)

Length [C]	Height [HT]	
1300	2100	2200
1500	2100	2200
1700	2100	2200
1900	2100	2200
2100	2100	2200

H below the Track [HSB]	L+Jambs [A]	Pocket [B]
2045 2145	650	600
2045 2145	750	700
2045 2145	850	800
2045 2145	950	900
2045 2145	1050	1000

RAGGI STANDARD:
R=1000-1200-1500-1700-2000 mm
misure riferite all'asse binario.

RAGGI FUORI STANDARD:
È possibile richiedere raggi fuori standard con
dimensione minima 1000 mm.

Arkimede

CURVED SLIDING DOOR / PORTE COULISSANTE COURBE

DOUBLE DOOR / DOUBLE VANTAUX

**PLASTERBOARD
PLAQUE DE PLÂTRE**

Cod. AKDC




Feasible Dimensions

Length **[L]** from 600 + 600 mm to 1200 + 1200 mm (wall 125)
Height **[H]** from 1000 mm to 2500 mm (wall 125)



Overall Dimensions Formula

Length **[C]** = **[L]** x 2 + 100 mm
Height **[HT]** = **[H]** + 100 mm

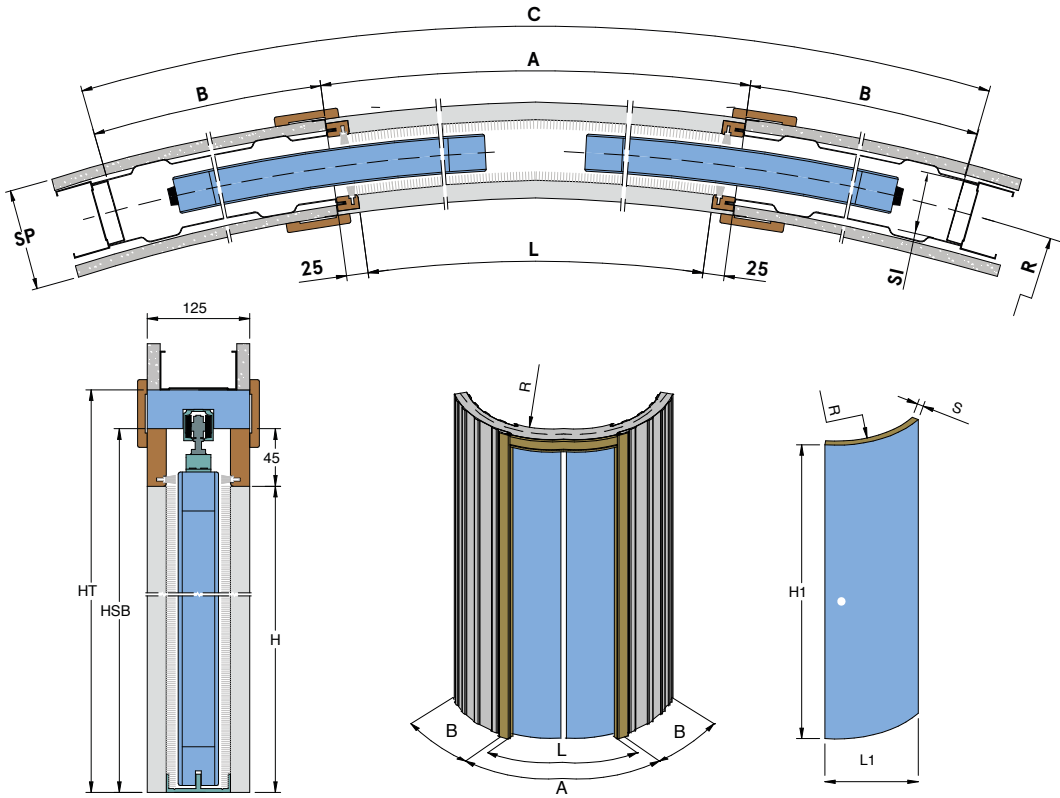

- Frame / Châssis
- Door / Porte
- Plasterboard / Plaque de plâtre

Wall	Internal Studwork	Door
125	80	100
		42

PASSAGE SIZE (mm)

Length [L]	Height [H]	
1200	2000	2100
1400	2000	2100
1600	2000	2100
1800	2000	2100
2000	2000	2100

DOOR SIZE (mm)

Length [L1]	Height [H1]	
620	2010	2110
720	2010	2110
820	2010	2110
920	2010	2110
1020	2010	2110

OVERALL SIZE (mm)

Length [C]	Height [HT]	
2500	2100	2200
2900	2100	2200
3300	2100	2200
3700	2100	2200
4100	2100	2200

H below the Track [HSB]	L+Jambs [A]	Pocket [B]
2045 2145	1250	600
2045 2145	1450	700
2045 2145	1650	800
2045 2145	1850	900
2045 2145	2050	1000

RAGGI STANDARD:
R=1000-1200-1500-1700-2000 mm
misure riferite all'asse binario.

RAGGI FUORI STANDARD:
È possibile richiedere raggi fuori standard con
dimensione minima 1000 mm.